

TENDEUR À 2 TIGES À SOUDER (ACIER)

CAP LEVAGE

DESCRIPTIF


Cage : acier C15 estampé.

Tige : Acier C15

AVANTAGES

- Coefficient de sécurité : 4 fois la CMU

DISPONIBLE SUR STOCK

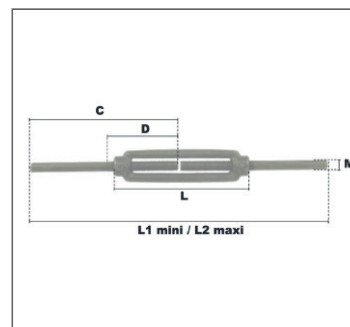

RÉFÉRENCE	FILETAGE	CMU	C	D	M	L	L1	L2	POIDS LE %
		kg	mm	mm	mm	mm	mm	mm	kg
TAS116	M16	1300	200	100	14,5	190	400	545	86
TAS118	M18	1650	220	120	16,1	205	440	595	113
TAS120	M20	2000	220	120	18,1	220	440	600	158
TAS122	M22	2470	220	130	20,1	240	440	615	205
TAS124	M24	2940	260	150	21,7	260	520	710	267,5
TAS127	M27	3700	260	160	24,6	300	520	725	371,5
TAS130	M30	4680	260	160	27,35	310	520	715	448
TAS133	M33	5670	260	160	30,35	310	520	715	582
TAS136	M36	6800	300	180	33,1	295	600	785	693,5
TAS139	M39	7950	300	200	36,1	330	600	875	976